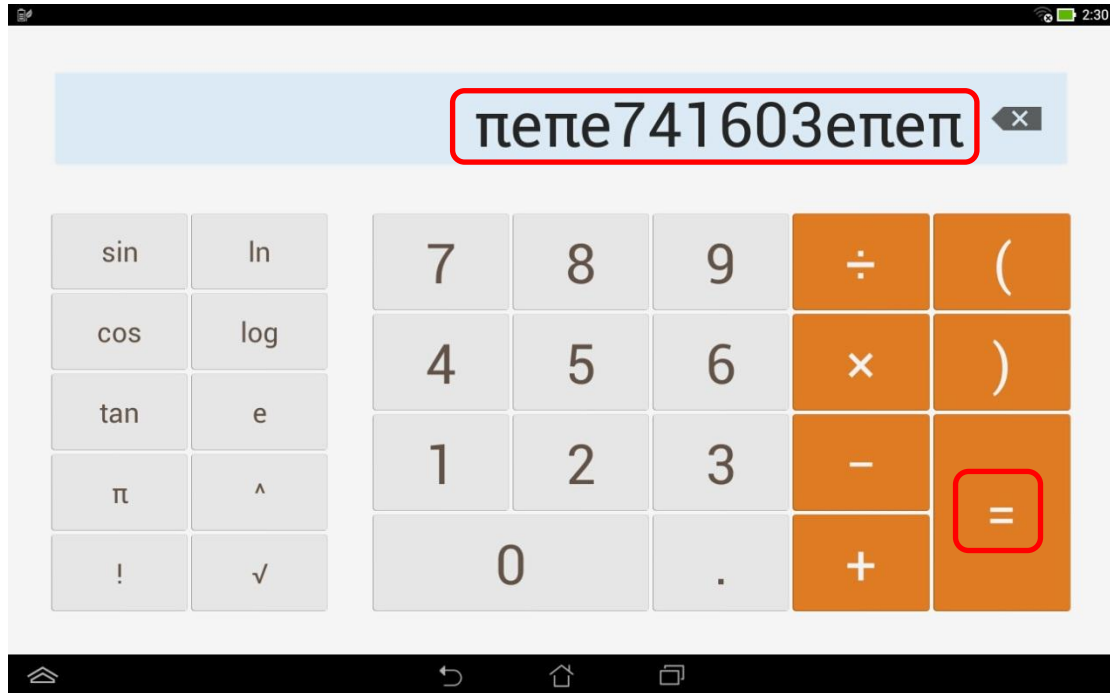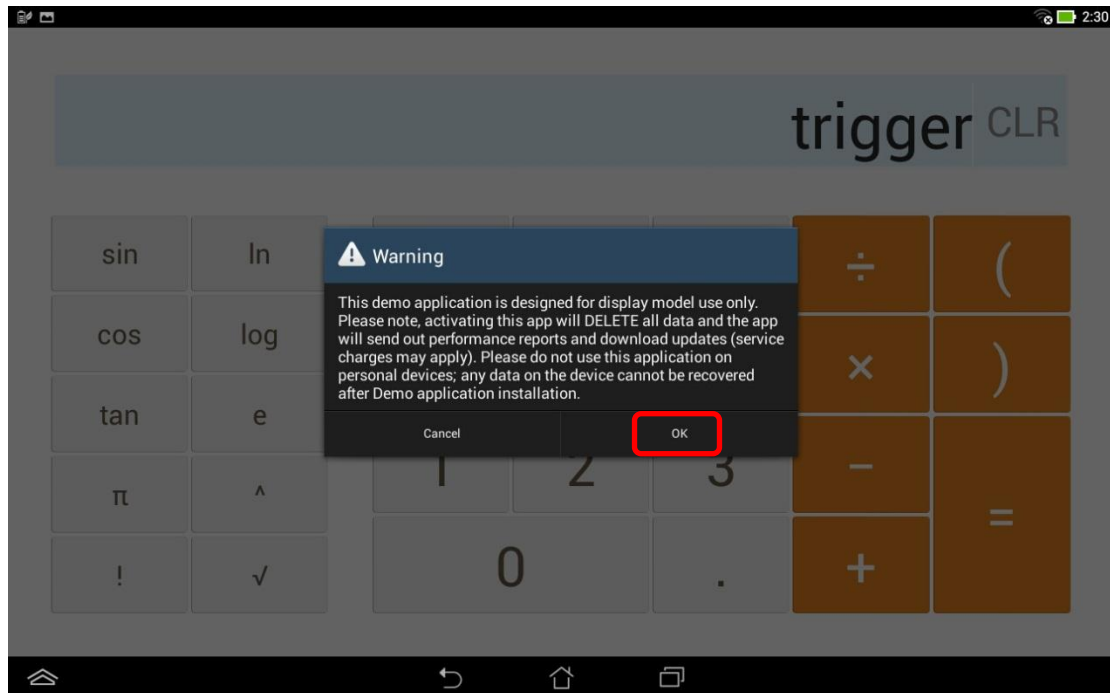1. Simplified installation. First to key in the password in calculator app ![Calculator] to turn on demo app.
2. Enter pin code: [πeπe741603eπeπ]
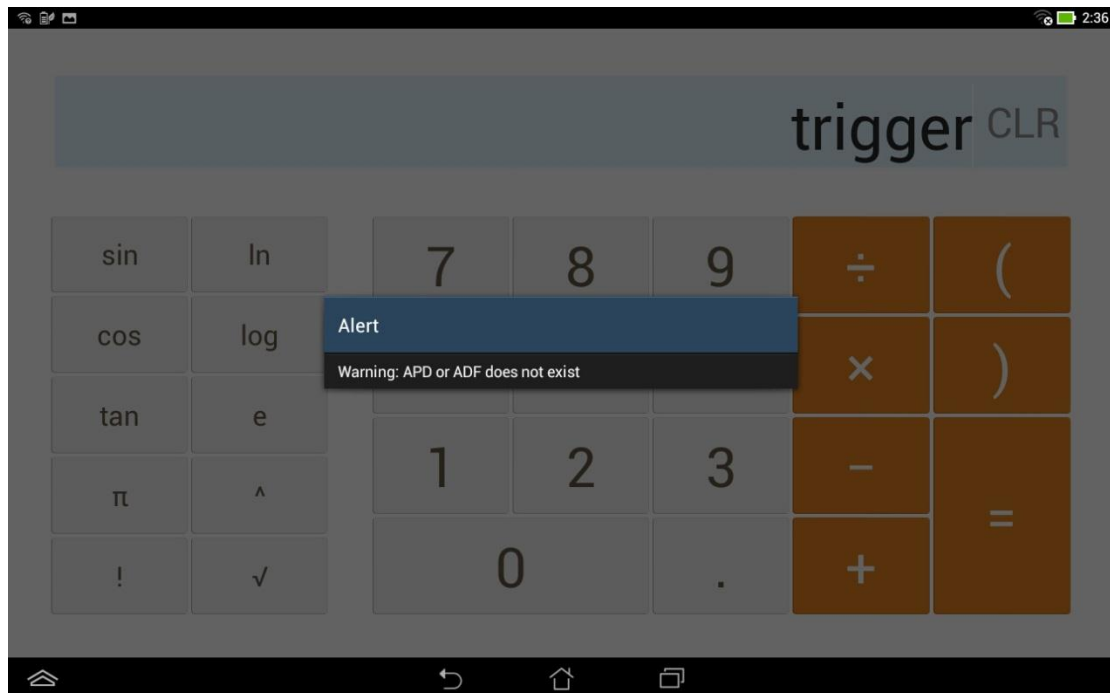3. Tap [=] to trigger demo app

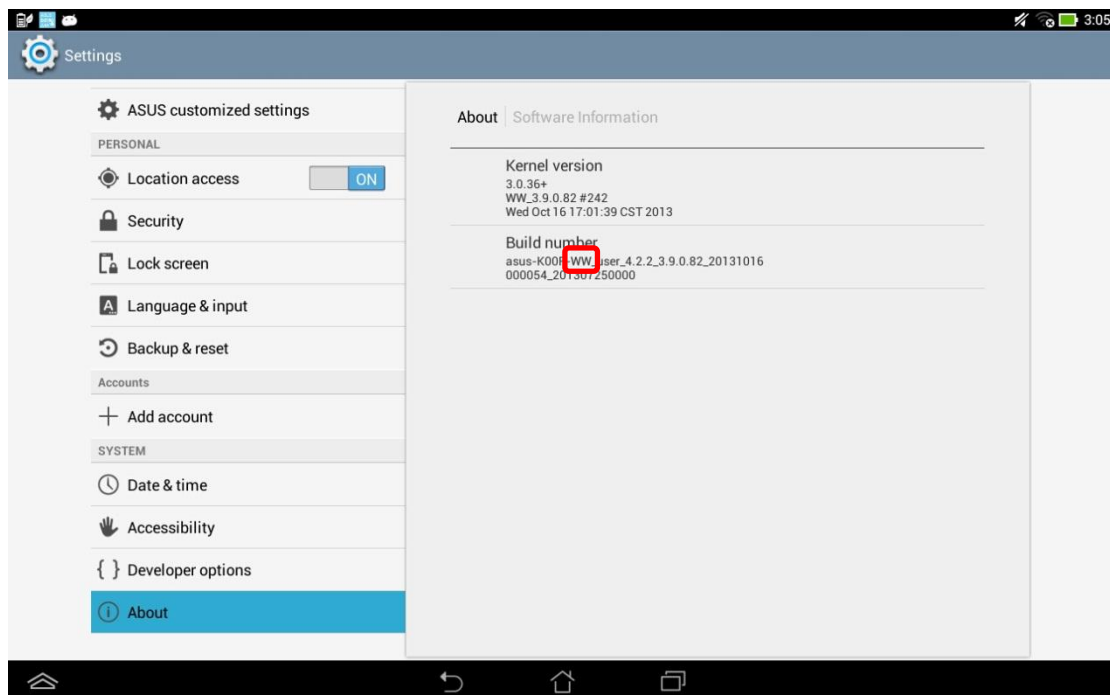4. If pop up below warning message, choose [OK] → Welcome to Asus Demo 2.0!

    i.   Go to http://www.asus.com/microsite/demo/Demo2.0Sop.htm for more detail information.

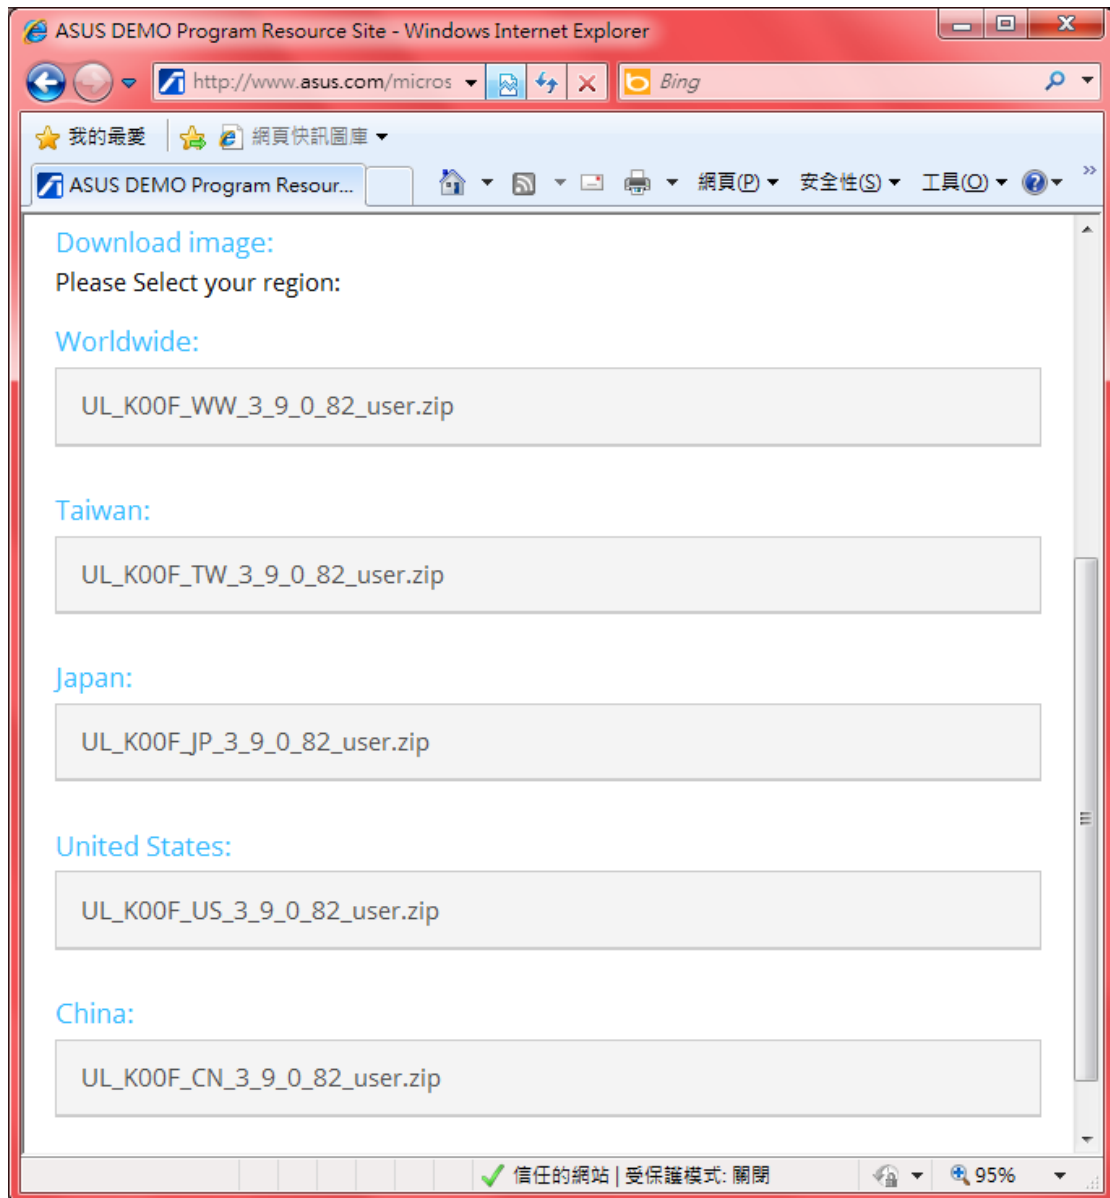5. If pop up warning message: "Warning: APD or ADF does not exist" as below

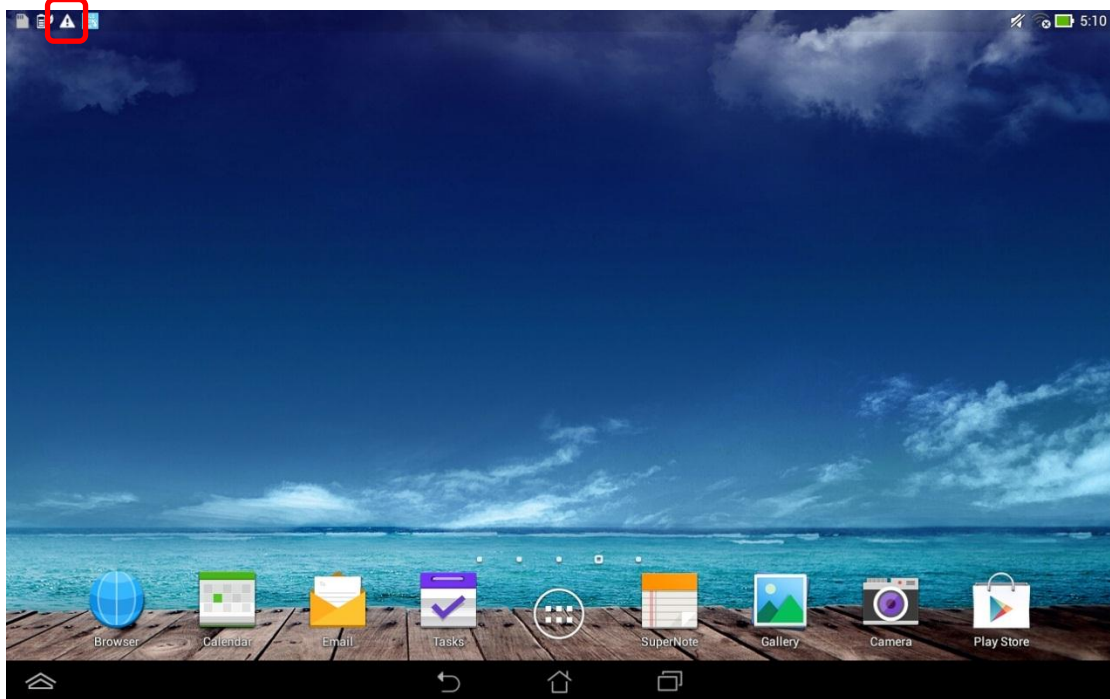   i. Go to [Settings] -> [About] -> [Build number] to check your SKU

ii. Base on your SKU to download image from:
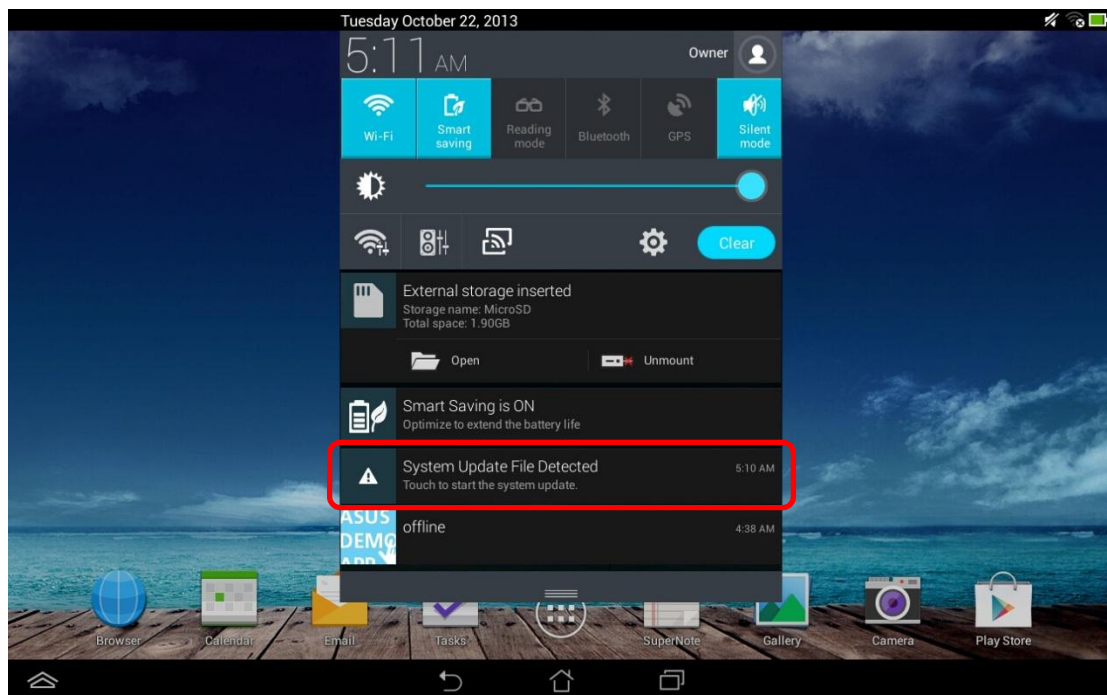
http://www.asus.com/microsite/demo/MeMO_Pad10.htm

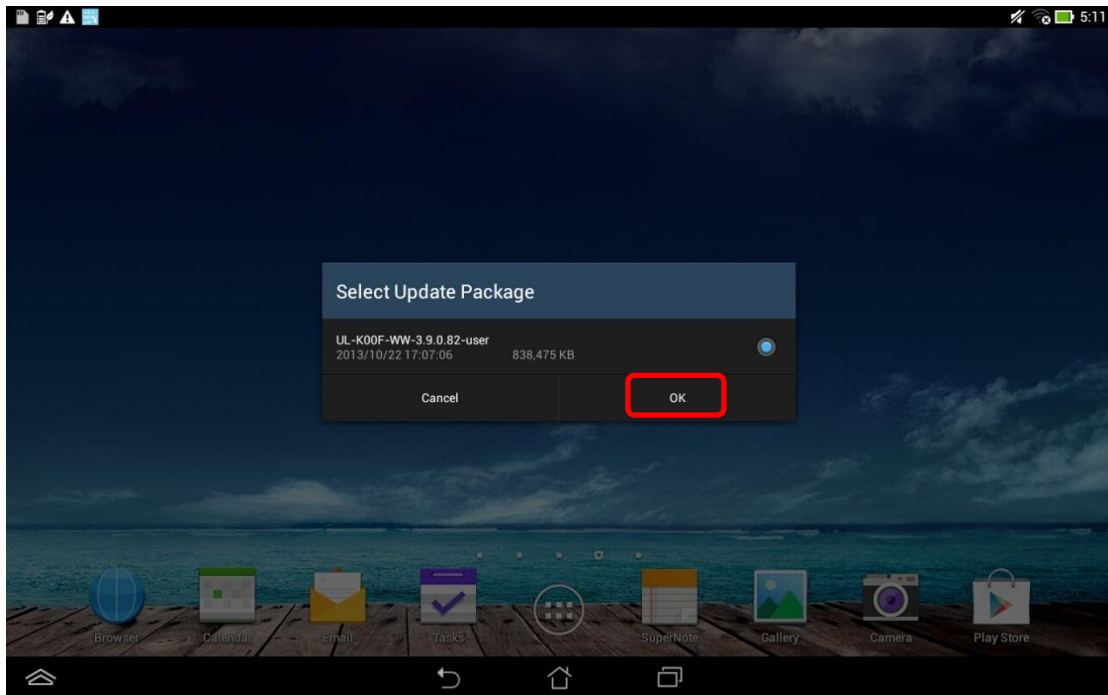iii. Copy the image to MicroSD card (make sure *only one image file in your MicroSD card, or device can't detect it)

iv.	insert MicroSD card to the device and will see △ on the top left corner
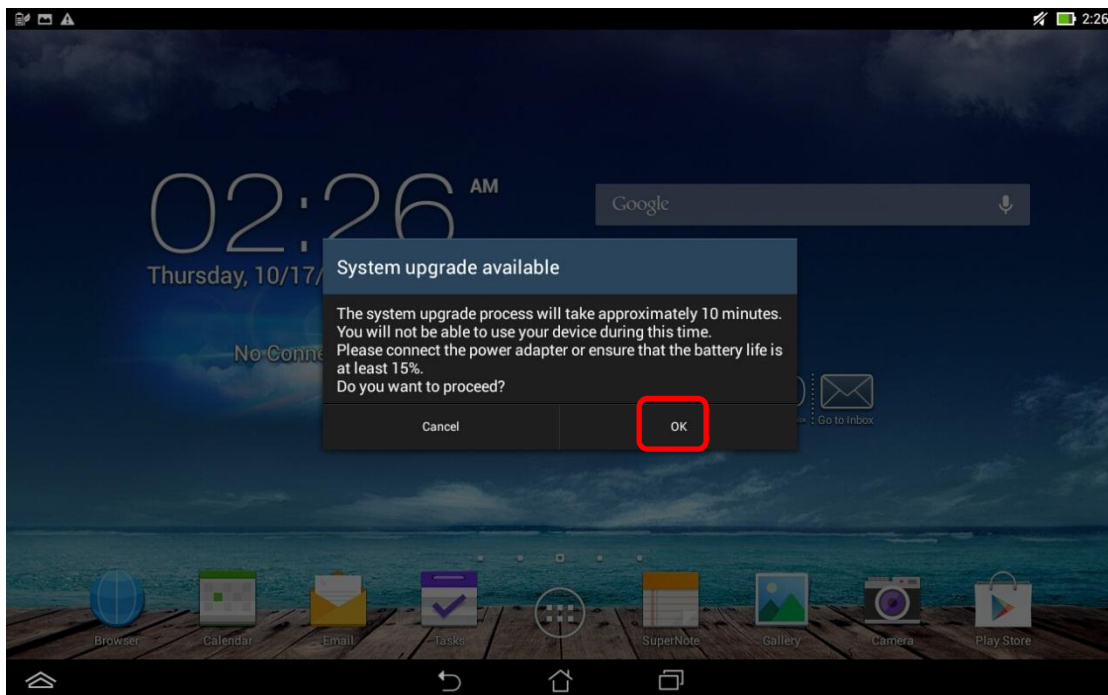

v.	Scroll down [ASUS Quick Setting] from top and tap [System Update File Detected]
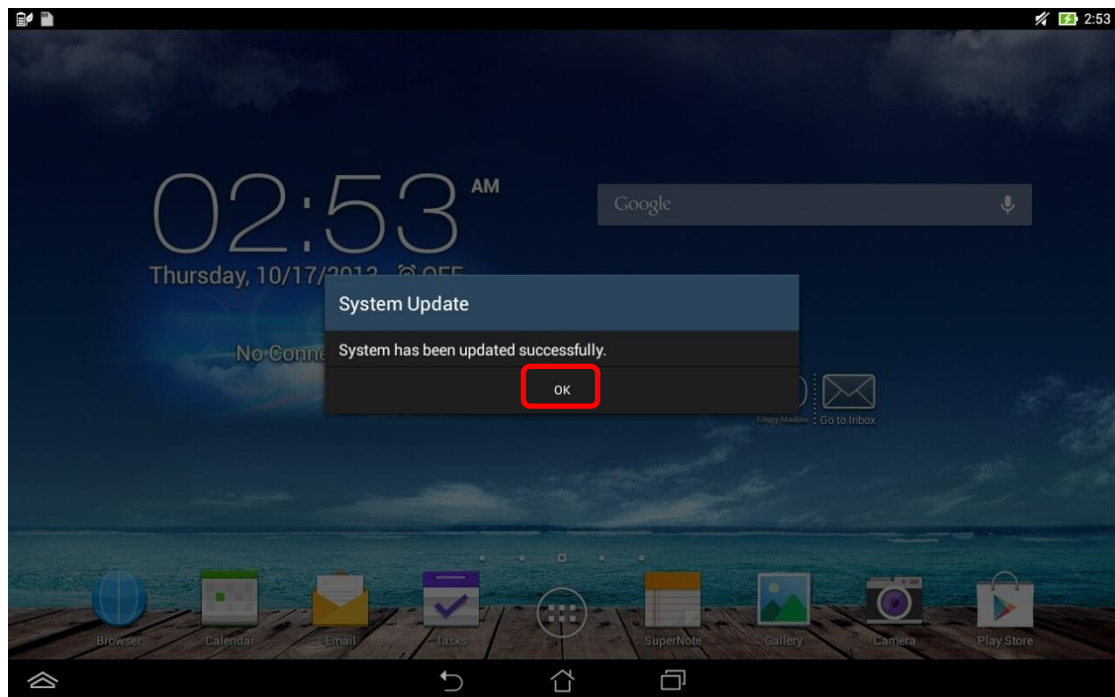
vi.   Tap [OK]

vii.   Tap [OK] again

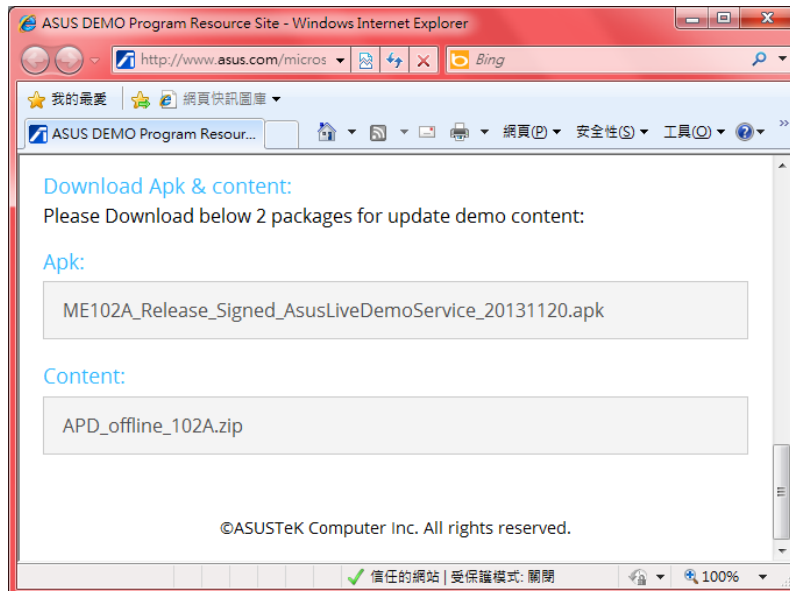viii.   Wait for system update and reboot automatically
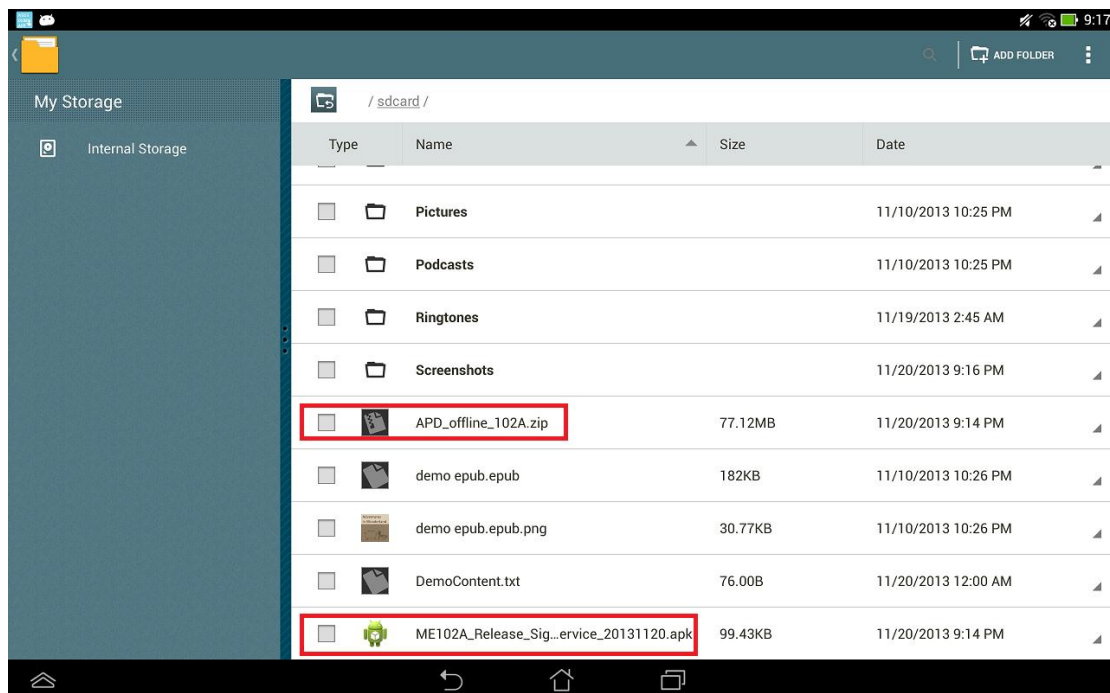
ix.   Tap [OK] after reboot

x.   Go to http://www.asus.com/microsite/demo/Demo2.0Sop.htm for more
      detail information.

6. If left-top corner has demo app blue icon but no demoapp content show up

7. Download "ME102A_Release_Signed_AsusLiveDemoService_20131120.apk" & "APD_offline_102A.zip" from
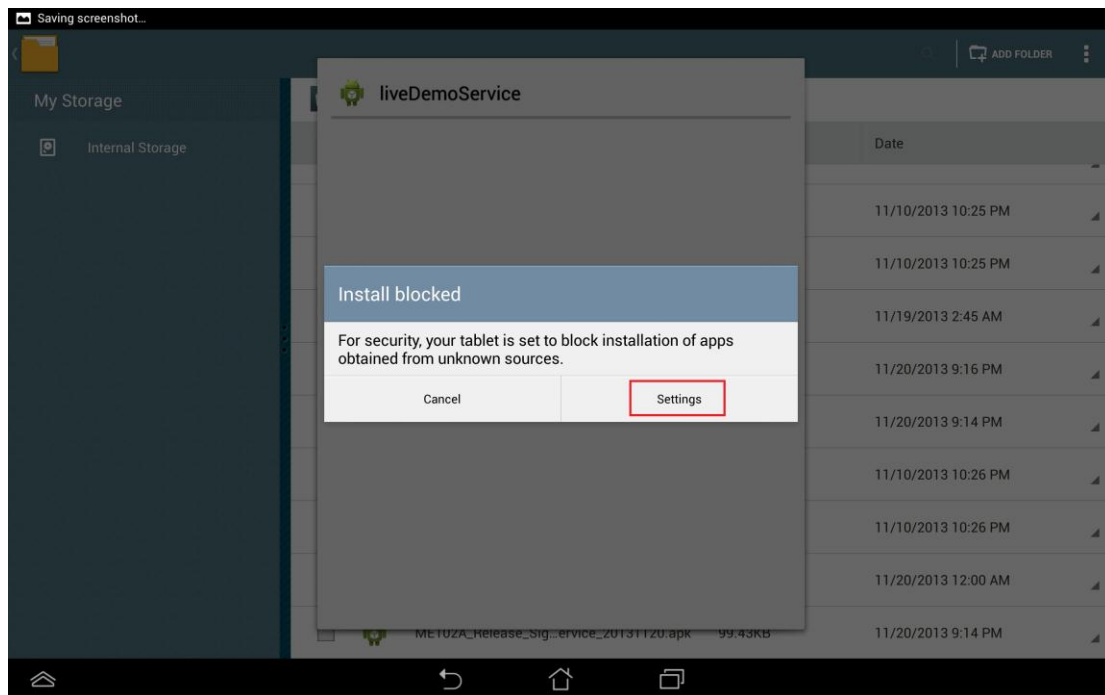   http://www.asus.com/microsite/demo/MeMO_Pad10.htm

i.   copy "ME102A_Release_Signed_AsusLiveDemoService_20131120.apk" & "APD_offline_102A.zip" to ME102 device's internal storage
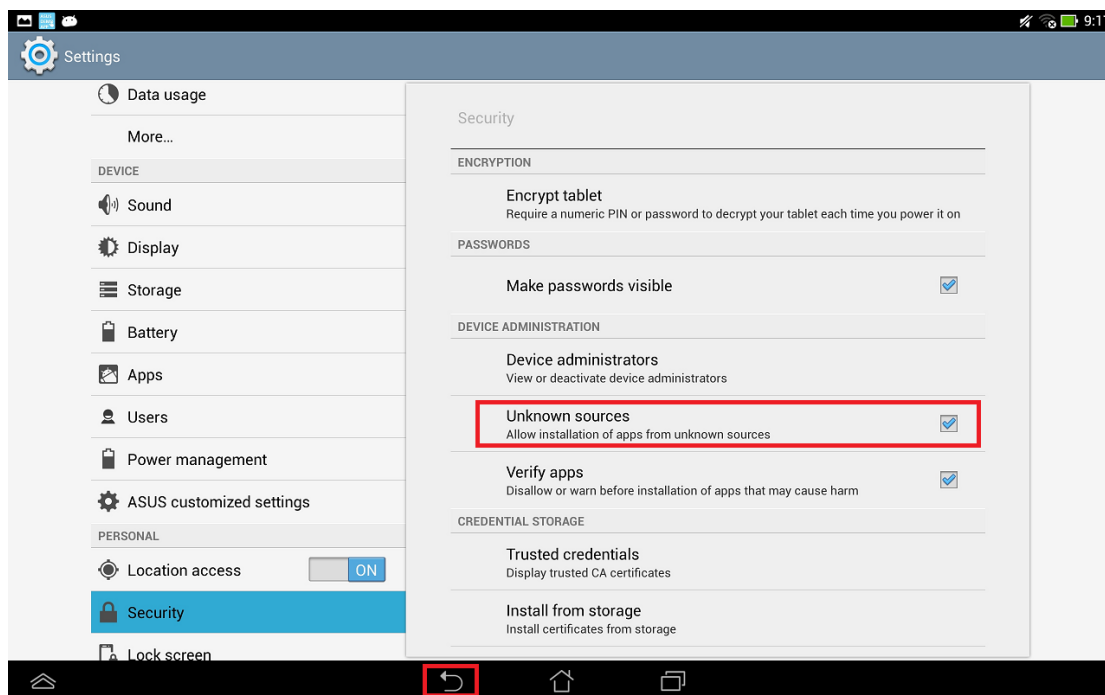
ii. Tap "ME102A_Release_Signed_AsusLiveDemoService_20131120.apk" to install
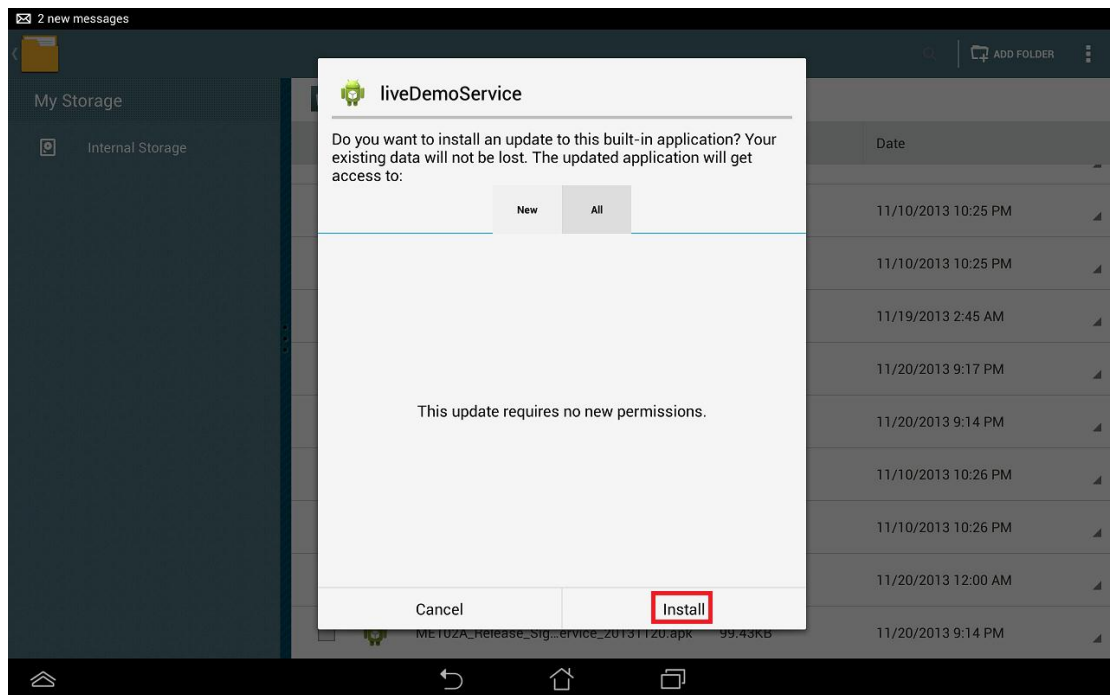
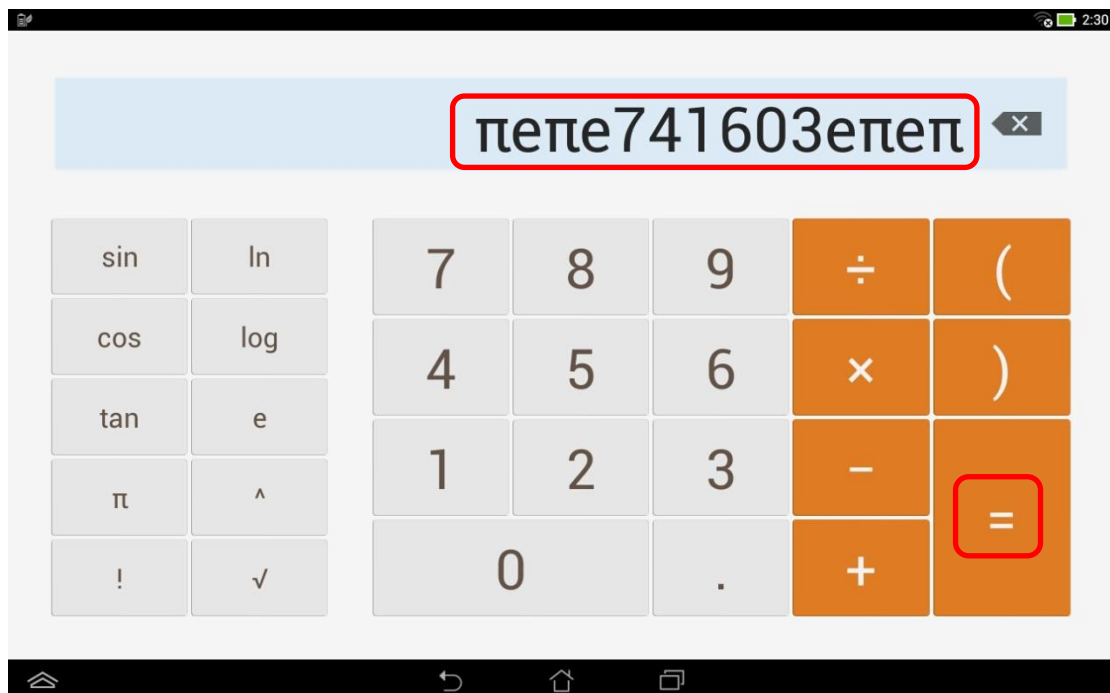i. Tap [Settings]

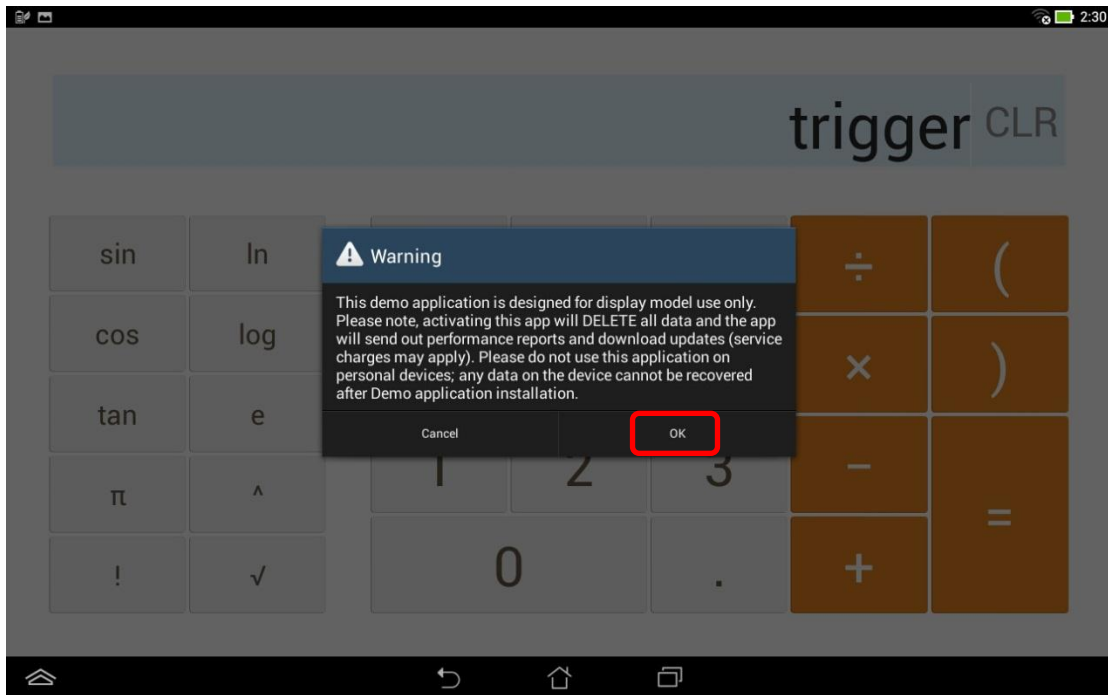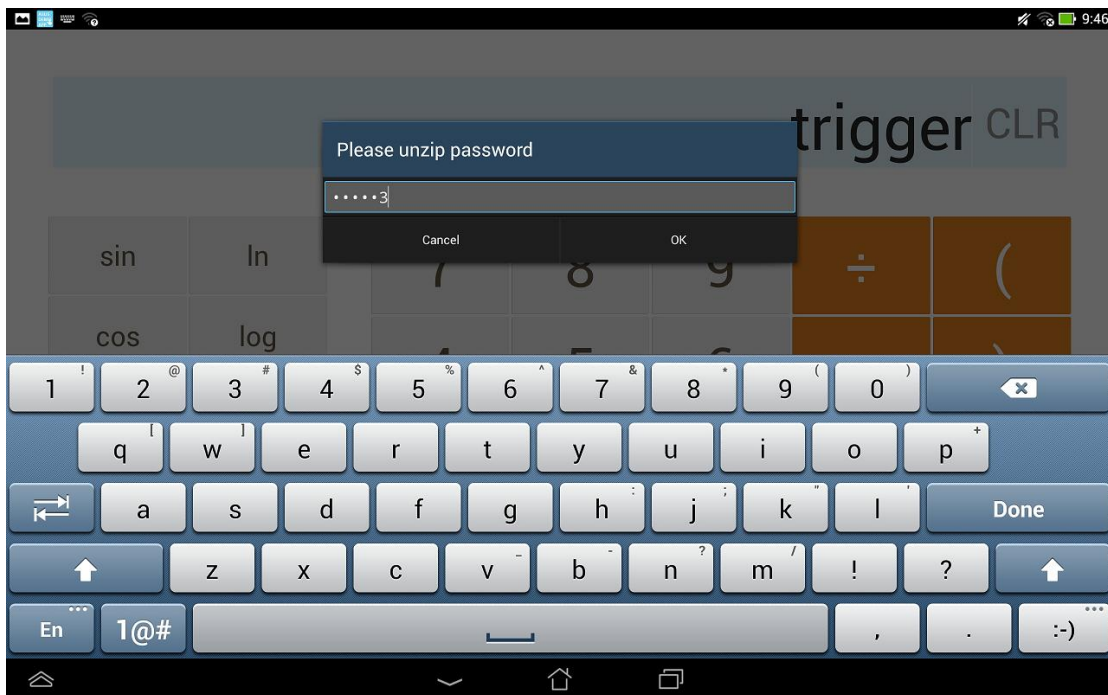ii. Check [Unknown sources] and tap [back key]

iii.   Tap "" and tap [Install]

8. Key in the password in calculator app to turn on demo app again.
    i.   Enter pin code: [πεπε741603επεπ]
    ii.   Tap [=] to trigger demo app

iii.   If pop up below warning message, choose [OK]

iv.   Enter the pin code: [741603] when below warning message pop up

9. Wait for update and finish.